

Based on many years of experience in drawer production, the SINUS system was developed as a modular concept. The development focused on attractive design, high durability and stability as well as absolute ease of assembly. The result is a versatile drawer system which, in addition to the problem-free use, also offers a wide range of design options.


The pages can be designed in almost unlimited ways and lend themselves to a consistent corporate design. The standard colours are F174 = pure white (similar to RAL 9010) and F120 = light grey (similar to RAL 7040).



- Front fitting system is specially developed and patented for SINLIS
- Fast and tool-free assembly/disassembly
- Easy mounting of knobs and handles
- Adjustment also takes place without tools
- Sides are plugged together and lock securely in place
- Any width dimension can be produced
- Problem-free logistics due to modular system design
- Durable, long-lasting polystyrene
- Certified quality by LGA test, quality certificate no. 544 for drawers/no. 545 for pull-out shelves
- Can be combined with ELCO cutlery trays

## Individual parts

| Side 4-sided, without groove for decorative strips | Н              | D               |
|--|----------------|-----------------|
|  | 90             | 430             |
|  | 90             | 485             |
|  | 90             | 485/2-level set |
| Special dimensions                                 | on request     |                 |
|  |                |                 |
|  |                |                 |
| Side 3-sided, without groove for decorative strips | Н              | D               |
|  | <b>H</b><br>90 | <b>D</b> 430    |
|  |                | D               |
|  | 90             | 430             |






## Accessories

| Wire side single, with adjustment | Ø | D           |
|-----------------------------------|---|-------------|
|                                   | 8 | 430         |
|                                   | 8 | 485         |
|                                   |   |             |
| Front receptacle, L/R usable      | Ø |             |
|                                   |   | Screw-on    |
|                                   | 8 | With dowels |
|                                   |   |             |

| Carcase width | Ø | Wire back panel simple |
|---------------|---|------------------------|
| 30er          | 8 |                        |
| 40er          | 8 |                        |
| 45er          | 8 |                        |
| 50er          | 8 |                        |
| 60er          | 8 |                        |

## Fitting dimensions

|         | Inner<br>dimension | Α   | В     | С   |
|---------|--------------------|-----|-------|-----|
| K0 300  | 267                | 218 | 187,8 | 194 |
| K0 350  | 317                | 268 | 237,8 | 244 |
| K0 400  | 367                | 318 | 287,8 | 294 |
| K0 450  | 417                | 368 | 337,8 | 344 |
| K0 500  | 467                | 418 | 387,8 | 394 |
| K0 600  | 567                | 518 | 487,8 | 494 |
| K0 700  | 667                | 618 | 587,8 | 594 |
| K0 800  | 767                | 718 | 687,8 | 694 |
| K0 900  | 867                | 818 | 787,8 | 794 |
| K0 1000 | 967                | 918 | 887,8 | 894 |

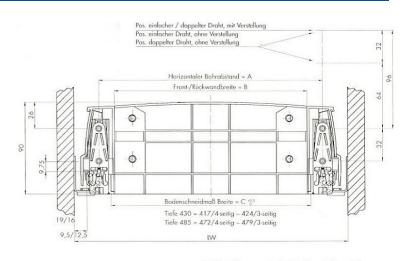

Sämtliche Artikalnummern gelten für die Ausführung für 16 mm Böden. Für andere Ausführungen gelten andere Artikelnummern. Jachnische Änderungen bleiben vorbehalten.